American Standard

Style That Works Better

CADET

TWO-HANDLE KITCHEN FAUCET

WITH BRASS GOOSENECK SPOUT

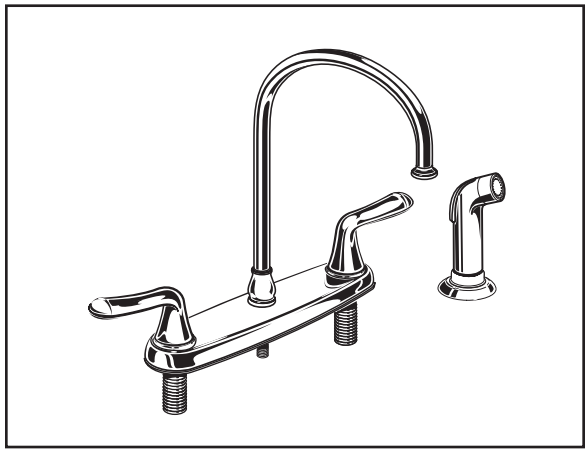

MODEL NUMBER:

❑ **6425 Kitchen Faucet**
Metal Lever Handles. Separate Handspray.
Polished Chrome finish.

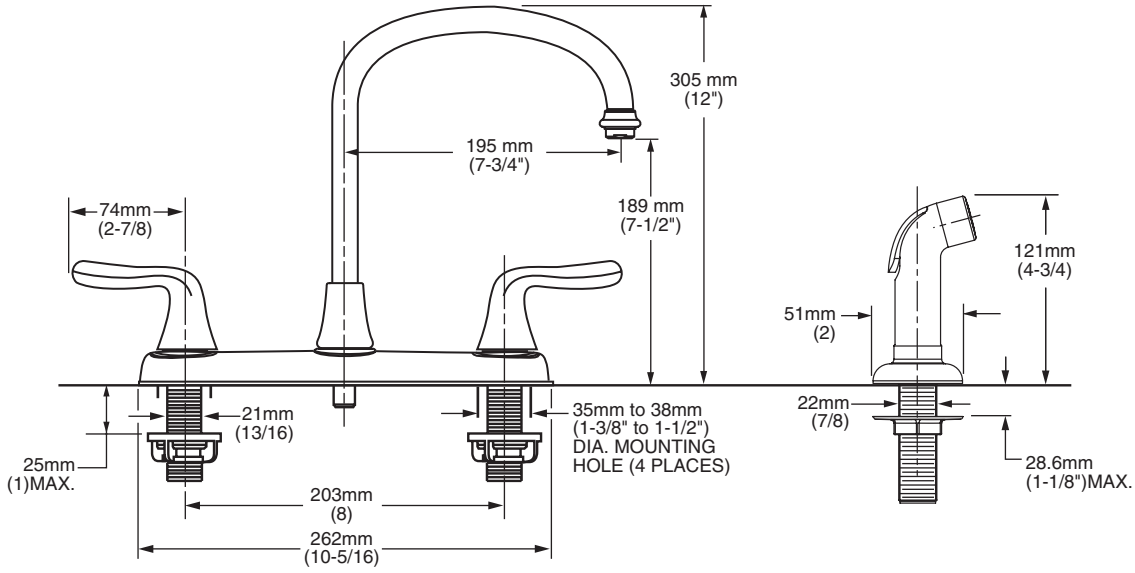

GENERAL DESCRIPTION:

Durable brass construction. 1/4 turn washerless ceramic disc valve cartridges. Durable cast brass waterway with 1/2" male inlet shanks. Brass gooseneck swivel spout. Metal escutcheon plate (escutcheon size 10-5/16"L x 2-3/8"W). 2.2gpm/8.3L/min. maximum flow rate. Metal lever handles.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridges: Assures a lifetime of smooth handle operation and drip-free performance.

Cast Brass Waterways: Strong and durable. Integral tabs on casting provide a wobble-free installation.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Simple Installation: Fast and easy one person installation. Faucet drops in from top. Quick spin nuts secure faucet in place.

Lifetime Warranty: On Function and Finish.

SUGGESTED SPECIFICATION:

Two handle kitchen faucet shall feature a cast brass waterway. Shall also feature 1/4 turn washerless ceramic disc valve cartridges that are reversible for use on either "hot" or "cold" side. Brass gooseneck swivel spout. Fitting shall be American Standard Model #6425.

© 2008 AS America, Inc.

CADET
TWO-HANDLE KITCHEN FAUCET
WITH BRASS GOOSENECK SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1
CSA B 125
NSF 61/Section 9
ANSI A117.1

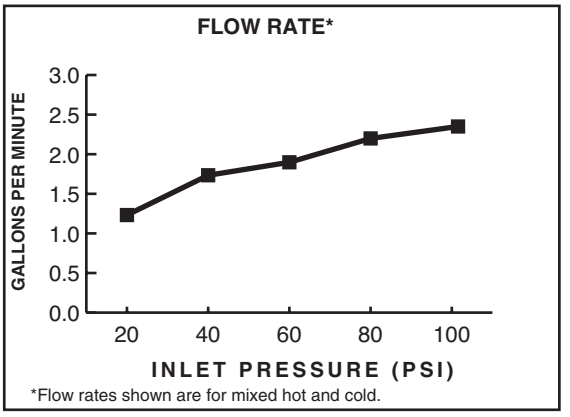

Product Number	Description
6425	Kitchen faucet. Metal Lever handles. Separate White Handspray. Polished Chrome Finish.

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

© 2008 AS America, Inc.